

Our standard equipment is suitable for all general cargo.

All containers are equipped with various lashing devices on longitudinal rails and corner posts.

20ft Standard Containers*

Internal Dimensions	Length	mm	5890
	Width	mm	2350
	Height	mm	2391
Door Opening	Width	mm	2338
	Height	mm	2276
Weight	Max gross	kg	30480
	Tare	kg	2250
	Max Payload	kg	28230
Capacity	Cubic capacity	cbm	33



40ft High Cube Pallet Wide Containers*

Internal Dimensions	Length	mm	12100
	Width	mm	2444
	Height	mm	2688
Door Opening	Width	mm	2400
	Height	mm	2584
Weight	Max gross	kg	34000
	Tare	kg	4260
	Max Payload	kg	29740
Capacity	Cubic capacity	cbm	78.9



45ft High Cube Pallet Wide Containers*

Internal Dimensions	Length	mm	13556
	Width	mm	2444
	Height	mm	2694
Door Opening	Width	mm	2416
	Height	mm	2585
Weight	Max gross	kg	34000
	Tare	kg	4460
	Max Payload	kg	29540
Capacity	Cubic capacity	cbm	89.2



*approximate dimensions, full specs available from our offices

Please click on following link for an overview of maximum payloads - [Eucon Maximum Payloads.pdf](#)

20ft Flat Rack Containers*

Internal Dimensions	Length	mm	5638
	Width	mm	2226
Between End Panels	Length	mm	6042
Platform	Height	Mm	370
ISO Cargo	Width	mm	2438
	Height	mm	2385
Weight	Max gross	kg	34000
	Tare	kg	2990
	Max Payload	kg	31100
Capacity	Cubic capacity	cbm	n/a



20ft Hi Cube Open Top Containers*


Internal Dimensions	Length	mm	5900
	Width	mm	2348
	Height	mm	2664
Door Opening	Width	mm	2340
	Height	mm	2586
Weight	Max gross	kg	30480
	Tare	kg	2420
	Max Payload	kg	28060
Capacity	Cubic capacity	cbm	n/a



Note: This container is designed to carry cargo with ALL the roof bows, rear header, tarpaulin and TIR cord in place. Overheight cargo which requires any of the above items to be removed, is NOT permitted.

40ft Hi Cube Flat Rack Containers*

Internal Dimensions	Length	mm	11702
	Width	mm	2374
Between End Panels	Length	mm	12180
Platform	Height	Mm	432
ISO Cargo	Width	mm	2438
	Height	mm	2478
Weight	Max gross	kg	34000
	Tare	kg	5500
	Max Payload	kg	28500
Capacity	Cubic capacity	cbm	n/a

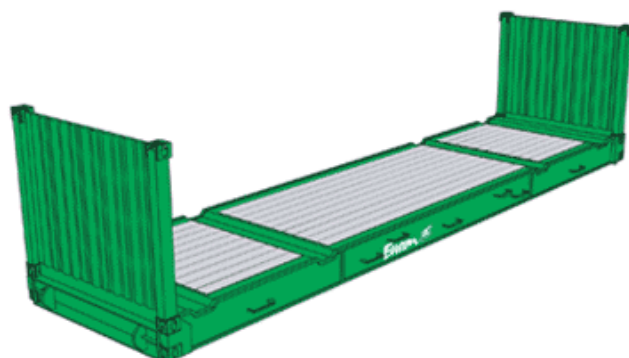

*approximate dimensions, full specs available from our offices

Please click on following link for an overview of maximum payloads - [Eucon Maximum Payloads.pdf](#)

SPECIALISED EQUIPMENT

40ft Open Top Containers*


Internal Dimensions	Length	mm	12032
	Width	mm	2352
	Height	mm	2348
Door Opening	Width	mm	2340
	Height	mm	2280
Weight	Max gross	kg	32500
	Tare	kg	3850
	Max Payload	kg	28650
Capacity	Cubic capacity	cbm	n/a



Note: This container is designed to carry cargo with ALL the roof bows, rear header, tarpaulin and TIR cord in place. Overheight cargo which requires any of the above items to be removed, is NOT permitted.

45ft Hi Cube Pallet Wide Open Side/Curtain Containers*

Internal Dimensions	Length	mm	13555
	Width	mm	2458
	Height	mm	2493
Door Opening	Width	mm	2434
	Height	mm	2380
Side Opening	Width	mm	12490
	Height	mm	2293
Pelmet	Height	mm	2393
Weight	Max gross	kg	34000
	Tare	kg	5990
	Max Payload	kg	28010
Capacity	Cubic capacity	cbm	83.1

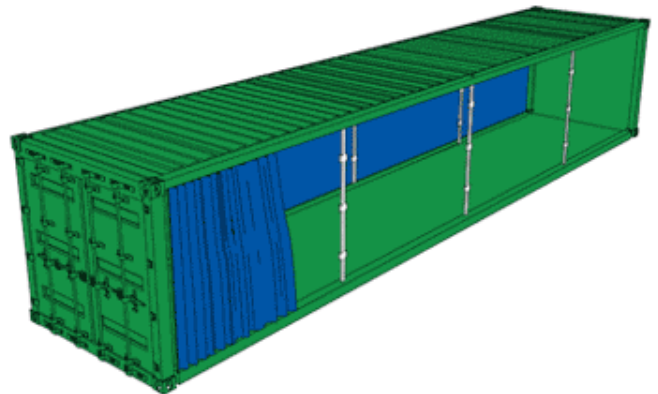

*approximate dimensions, full specs available from our offices

Please click on following link for an overview of maximum payloads - [Eucon Maximum Payloads.pdf](#)

TEMPERATURE CONTROLLED EQUIPMENT

45ft Hi Cube Pallet Wide Refrigerated Containers*

Internal Dimensions	Length	mm	13316
	Width	mm	2440
	Height	mm	2582
Gooseneck Tunnel	Length	mm	3884
	Width	mm	1029
	Height	mm	120
Door Opening	Width	mm	2440
	Height	mm	2567
Weight	Max gross	kg	34000
	Tare	kg	6090
	Max Payload	kg	27910
Insulation	Roof	mm	108
	Side Walls	mm	48
	Door Panels	mm	55
	Floor	mm	69/124
Capacity	Cubic capacity	cbm	83.9



*approximate dimensions, full specs available from our offices

Please click on following link for an overview of maximum payloads - [Eucon Maximum Payloads.pdf](#)